


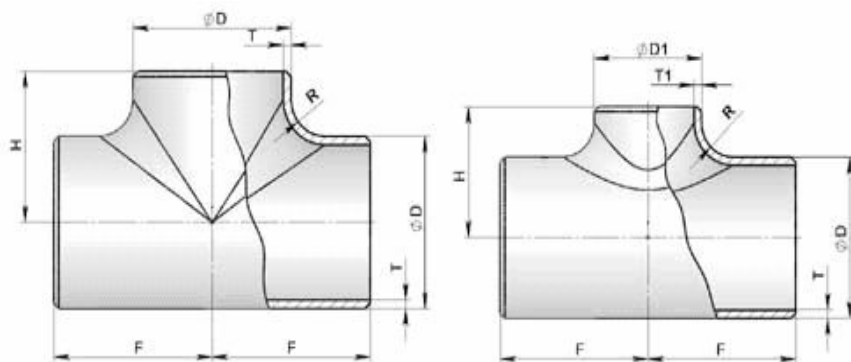

(4712) 38-24-80
38-36-93

Тройники ГОСТ 17376-2001, ТУ 102-488-95

Наружный Толщина							
Условный диаметр DN	Наружный Диаметр D	Толщина Стенки T	диаметр D1	стенки T1	F	H	
15	20	2.0	-	-	25	15	
		3.0					
		5.0					
20	25	2.0	20	2.0	29	20	
		3.0		3.0			
		4.0		4.0			
		2.0					
		3.0					
		4.0					
25	32	2.0	20	2.0	38	25	
		3.0		3.0			
		4.0		4.0			
		2.0	25	2.0			
		3.0		3.0			
		4.0		4.0			
		2.0	-	-			
		3.0					
		4.0					
	33.7	2.0	-	-		38	38
		3.0					
		4.0					
40		2.5.	-	-	40	40	
		4.0					
		5.0					
50	57	3.0	45	2.5.	50	45	
		4.0		3.0			
		5.0		4.0			

50	57	3.0	-	-	50	45
		4.0				
		5.0				
65	76	3.5.	-	-	65	60
		6.0				
		7.0				
80	89	3.5.	-	-	80	70
		6.0				
		7.0				
100	108	4.0.	89	4.0	100	80
		6.0		6.0		
		8.0		8.0		
		9.0		8.0		
100	108	4.0	-	-	100	80
		6.0				
		8.0				
		9.0				
150	159	4.5.	-	-	130	110
		6.0				
		8.0				
		10.0				
		12.0				
200	219	6.0	-	-	160	140
		8.0				
		10.0				
300	325	8.0	-	-	220	200
		10.0				
		12.0				

ООО «Даймонд К»